



am writing to introduce flooring system and tell you about the products and services we have developed for all type and size of industry. We specialize in the finishing, sealing and repair of concrete floors. Our many products include various types of non-skid safety coatings.

We are leading manufacturer and supplier of Industrial Flooring System with and experience of 8 years. We have been in this business since 2007 and in that time we have built a solid reputation of quality, dependency and value and customer satisfaction. We specialize in the finshing, sealing and repair of floors.

Our main products include various types of non-skid safety coating like:

Epoxy Flooring Epoxy Coving UV Resistance Coating EPU Flooring

Wall Coating (Pharma & Industrial) Building construction & Maintenance

PU Flooring Water Proofing Industrial Paints ESD Flooring

Groove Filling / Gouting

We can provide any colors, finish, texture and properties like Acid Resistance, Oil Resistance, Impact and Temperature Resistance, Anti-skid and conductive etc. to your floor according to your requirment.

As sites we work around the customer schedule to minimize downtime and production interferences. Once the installing process begins, the crew works quickly and efficiently to complete the job in a timely manner and prove "Our Customers satisfaction is the Foundation of our Business."

After all, we believe in keeping continuous customer relation by extending technical service both on pre sales & post sales basis. Keeping this in mind, we provide Round The Clock Service to our customers.

Your Faithfully,





Epoxy Flooring


Our comprehensive range of industrial Epoxy flooring coating products are designed for with standing the harsh conditions that are common to heavy duty environment.

Benefits:

Excellent Gloss
Hard-Wearing
Abrasion resistant
Solvent free, low odour
Attractive, brightens up dull
factories & warehouse
Seamless & Hygenic Finish



PU Flooring




Benefits:

Excellent flexibility as compared to regular epoxy.

Excellent abrasion resistant.
Very good self leveling properties.
Excellent adhesion.



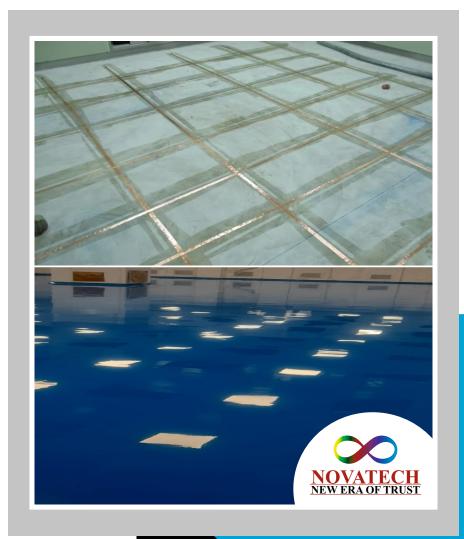

ESD Flooring

Our ESD flooring products has successfully proven to prevent harmful electrical charge build-up from destroying sensitive components by dissipating the charge safely to the ground.

Benefits:

Electrostatically conductive High Chemical Resistant Hard Wearing Resistant Good Abrasion Resistant



Application Process of Epoxy Flooring

Step - 1 Hard Grinding Step - 4 Soft Grinding

Step - 2 Priming Step - 5 Sealer Coat

Step - 3 Screeding Step - 6 Top Coat





- Water & Electricity required at the site should be provided round the clock.
- No change will be entertained after receipt of work order.
- Area of epoxy flooring should be made available vacant & clean to our execution team without interruption & hindrances during the scheduled timer for bond, successful execution.
- Round the clock work permission to our personnel is to be provided.



12 months under normal condition of usage & maintenance from the date of completion during which period any defect noticed & intimated to us or duly detected any our personal inspection shall be rectified free of cost.

Warranty will cover the following:

- Integrity of the floor against de-bonding cracks.
- Cracks over the joints on exixting cracks.
- Resistance to chemical, oil & detegents.


We do not warranty of the followngs:-

- Scratched due to movement of sharp objects.
- Extraneous damages due to floor settlements or dynamic crack which other unexpected loads.
- Cracks occurring due to floor settlement or dynamic crack which were not treated earlier.
- Loss of gloss due to traffic movement.
- Breakage due to extraordinary impact loads.



To ensure adequate returns on your flooring investment, due care should be taken. The following measures will ensure a better performance & longer life of the floor coating system.

- Avoid water stagnation, wipe dry at the earliestliest.
- ♦ Avoid spillage of chemical & solvent, if spoiled, wipe dry at the earliest.
- Avoid spillage of oil, if spoiled wipe dry at the earliest.
- Avoid excessive impact.
- Do not apply point load on the surface.
- Do not heat on the floor surface.
- Do not drag objects.
- Do not drop sharp objects.
- Do not use trolleys with steel/iron casters.



- Floor topping thickness should be recommended norm.
- Use recommended materials only for floor painting.
- Floor should be cleaned with dilute standard detergent.
- Mop the floor using rubber or nylon broom only twice a day with water after sweeping the dust.
- Do not allow water to stagnate on the floor.
- Clean & wipe the floor with dy cloth & allow the floor dry.
- Do not drag heavy machines/vehicles on the stand, on the floor.
- Do not spill acid or any alkaline material on the floor.
- Avoid oil spillage on the floor for ensuring safety.
- Do not hammer anything by placing it on the floor.
- Do not usage trolley with steel/iron castors on the floor.
- Do not drags work benches on the floor.
- Use rubber mats below the work bench legs.
- Do not keep dismantled components on the floor.
- Do not heat any substance on the floor.
- Avoid sand spillage as this may act as an abrasive material.
- No point load should be applied on the floor.
- Do not use shoes/chappals with metals spikes/plates/nails in the sole.
- In case of chip off or abrasion contact the respective dealer/supplier at the early stage.



OUR CLIENTS































































































- Strict quality control& quality consistency.
- Use cutting edge technology for application.
- Wide range of product & system.
- Round the clock service (24x7)
- Qualified man power for monitoring application job effectively.
- Exceptional value for money.
- Continuous improvement (setting benchmarks).



- Our firm innovative floor eastablished in 2007. Novatech is a unit of innovative floor
- Experienced employees, skilled & trained execution team.
- Corporate office in Roorkee (UK) & branch office in Faridabad (Harayana).
- Upcoming setups: Rudrapur, Noida & Baddi (H.P.).



Our Presence



Corporate Office:

Nehru Stadium, Near Durga Chowk, Harshit Complex, Roorkee 247667

Phone: 9557184484, 8755999281

Email: iftd@ymail.com Website: www.iftd.in

Branch Office:

Shop No, E/1112, Dabu Colony, NIT, Faridabad, Harayana-121001

Phone: 8755999281 Email: iftd@ymail.com Website: www.iftd.in









